

VME64x TEST EXTENDER



FEATURES

- Designed to meet mechanical and electrical connection requirements of ANSI/VITA 1.1 D2.1 VME extensions standard
- All J1 and J2 connector pins can be individually switch isolated
- Test points for all 160 pins of J1 and J2
- Superior power distribution utilizing 2 oz. copper power and ground planes
- Optional J0 connector available
- Designed for use in 160mm and 220mm chassis
- Rugged card guide handles most legacy VME products

BOARD SPECIFICATIONS

- 12-layer stripline design
- PCB UL recognized 94V-0
- PCB FR-4 or equivalent
- PCB .062" thick

MECHANICAL SPECIFICATIONS

- 6U x 220mm
- All J1, J2 and J0 connectors are DIN, class II

DESCRIPTION


Elma Bustronic VME64x test extenders have been designed to comply with the mechanical and signal connection requirements of the ANSI/VITA 1.1 – 1997 VME extensions standard.

The VME64x extender boards are designed to bring a circuit card completely out of a card cage or enclosure so that it can be tested or debugged. This provides access to both sides of the test board. There are test points for all of the lines on each 160-pin connector. Each signal, power, and ground line can be individually isolated with the DIP switches. The VME64x extender board accommodates use in 160mm and 220mm chassis.

Additional features include high and low frequency decoupling capacitors, five signal layers and seven power and ground planes. Elma Bustronic test extenders are designed to maximize performance, minimize noise and give the customer the most reliable, cost-effective products possible. The rugged card guide handles securely hold the test board, ensuring a reliable connection.

VME64x TEST EXTENDER

LINE DRAWING

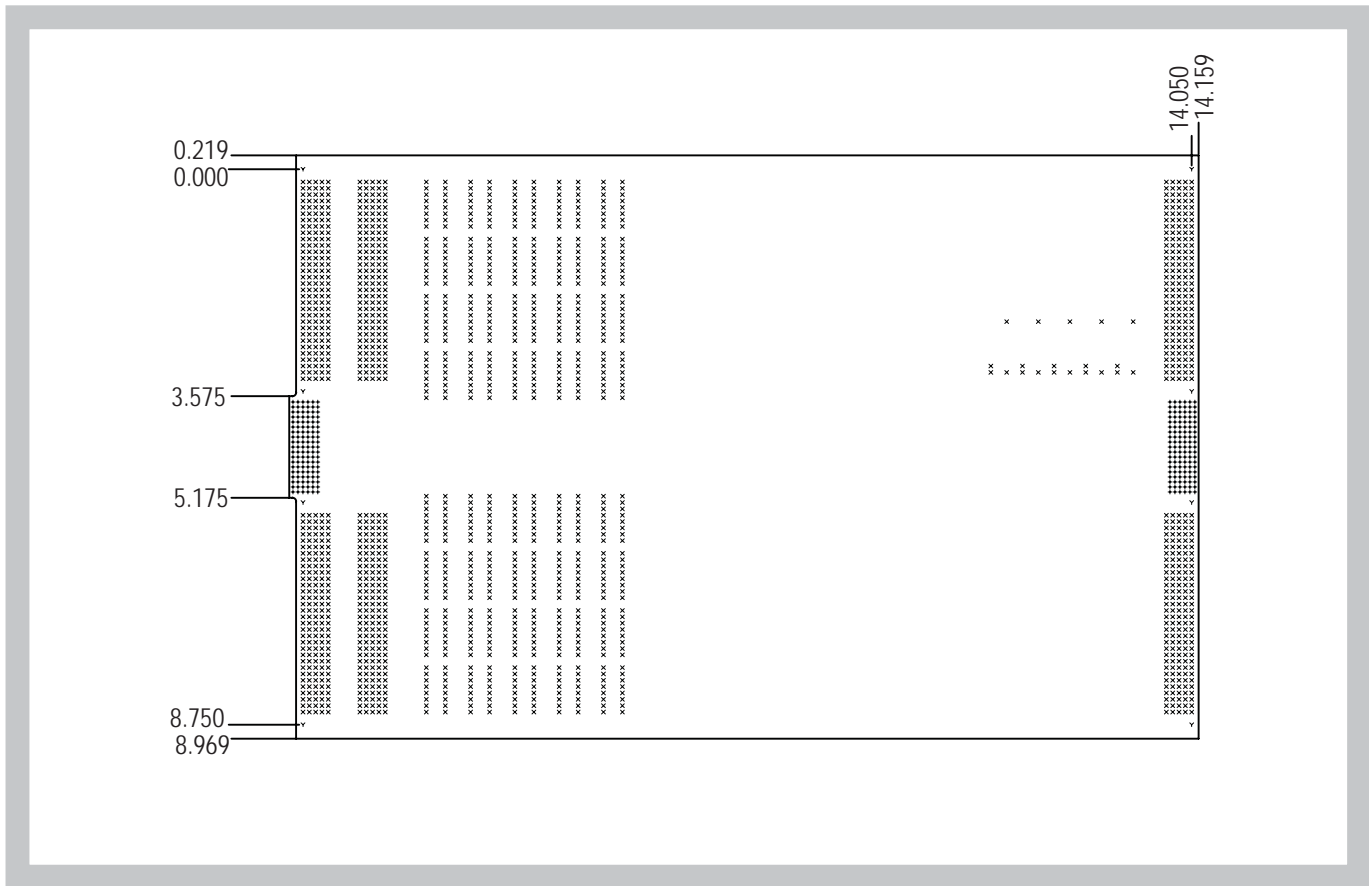

ORDER INFORMATION

Height	Length	Description	Part Number
6U	220mm	Without P0 Connector	116EXT6122-012X
6U	220mm	With P0 Connector	116EXT6122-0125