

# VITA System 32 Tower Enclosure (Medium)




## FEATURES:

- Portable or Deskside Tower
- 2U, 3U, 4U or 6U x 84HP (W x D)
- 6U horizontal card mounting
- 3, 5, 7 and 12 slot VITA-Based System Platforms (VME, VME64x, VPX, VXS, VXI)
- Advanced EMC shielding (optional) to meet CE and FCC
- Cooling front to rear
- Wide range of PSU inputs (90 - 264 VAC, 48 VDC)
- Attractive scratch resistant vinyl clad aluminum covers
- Fixed-mount or front pluggable PSUs with redundant hot swap options
- System monitoring for DC voltages, fan fail and over temp (optional)
- Connector options: 3 Row (96 PIN), 5 Row (160 PIN), 5 Row + PO
- Ready to run - turnkey solution

## SCOPE OF SUPPLY




High quality portable or deskside tower platform consisting of vinyl clad aluminum enclosures, high performance VITA System backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.

## ORDERING INFORMATION

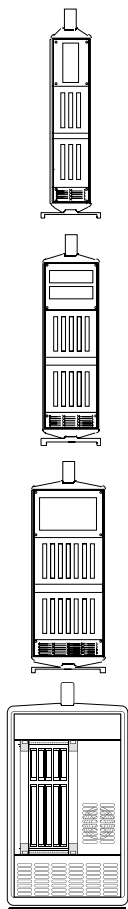

Description	Order Number
<ul style="list-style-type: none"> <li>■ 17"(H) x 3.50"(W) x 16.53"(D)</li> <li>■ Holds 3, 6U x160mm Cards</li> <li>■ 3 Slot VME or VME64x Backplane</li> <li>■ 1 x 3.5" Device</li> <li>■ 1 x 35 CFM Fan</li> <li>■ 150W: +5V/15A; +12V/5A; -12V/1A; -5V/1A, or 250W: 5V/40A; +12V/6A; -12V/6A; 3.3V/20A</li> </ul>	32V03MM128N4VC10 <b>VME</b>
	32V03OP128N4VCB0 <b>64X</b>
<ul style="list-style-type: none"> <li>■ 17"(H) x 5.25"(W) x 13.38"(D)</li> <li>■ Holds 5, 6U x160mm Cards</li> <li>■ 5 Slot VME or VME64x Backplane</li> <li>■ 2 x 3.5" Device</li> <li>■ 1 x 50 CFM Fan</li> <li>■ 150W: +5V/15A; +12V/5A; -12V/1A; -5V/1A, or 250W: 5V/40A; +12V/6A; -12V/6A; 3.3V/20A</li> </ul>	32V05MM238N3VC10 <b>VME</b>
	32V05OP238N3VCB0 <b>64X</b>
<ul style="list-style-type: none"> <li>■ 17"(H) x 7"(W) x 13.38"(D)</li> <li>■ Holds 7, 6U x160mm Cards</li> <li>■ 7 Slot VME or VME64x Backplane</li> <li>■ 2 x 5.25"HH Device</li> <li>■ 1 x 90 CFM Fan</li> <li>■ 250W: 5V/40A; +12V/6A; -12V/6A; 3.3V/20A</li> </ul>	32V07MM448N3VC20 <b>VME</b>
	32V07OP448N3VCB0 <b>64X</b>
<ul style="list-style-type: none"> <li>■ 17"(H) x10.5"(W) x 16.53"(D)</li> <li>■ Holds 5, 6U x160mm Cards</li> <li>■ 5 Slot VPX Backplane</li> <li>■ No Mounting Device</li> <li>■ 2 x 190 CFM Fans</li> <li>■ 1300W: 5V/40A; 12V/50A; 12V/16,7A; -12V/16.7A; 3.3V/40A</li> </ul>	32V05PSX68N4VCM0 <b>VPX</b>

## LINE DRAWINGS

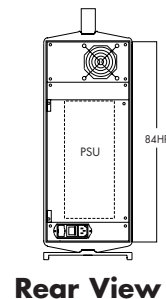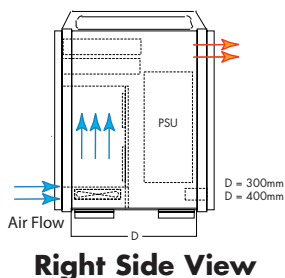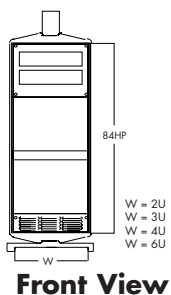

## ENVIRONMENTAL

	Operating	Storage / Transit
<b>Temperature:</b>	0°C to +50°C	-20°C to +70°C
<b>Altitude:</b>	6000 ft. (1,829m)	50,000 ft. (15,240m)
<b>Humidity:</b>	5% to 95% Non condensing	5% to 95% Non condensing
<b>Shock:</b>	5 G's @ 11ms	10 G's @ 11ms (per ASTM 0775)
<b>Vibration:</b>	1.0 G's @ 10 to 330 Hz	1.2 G's @ 5 to 330 Hz
<b>Agencies:</b>	Designed to meet UL 1950, FCC, CE	
<b>Weight:</b>	Approx: 30lbs	

## CUSTOM CONFIGURATIONS

32 V        8   V

- NUMBER OF SLOTS  
00-21: Single BP; AY-YA: Split  
Example 7 slot = 07  
Example 12 + 9 = 11

- BP BARE BOARD  
K = VITA 31.1  
L = VXS (Dual Star)  
M = V64, J12 mono, 3 row  
N = VME64x, 6U  
O = VME64x, 7U  
P = VPX, 6U (VITA 46)  
W = VPX, 3U (VITA 46)  
Q = J1 only  
R = J1/J2 Separate  
S = VXS (Star)  
T = VXS (Mesh)  
V = JO  
X = No BP Installed  
Y = Hybrid  
Z = Custom

- BP CONNECTOR  
(CONFIGURATION J1/J2/PO)  
L = 5 row, RT-2 PO & SW  
M = 3 row, J1 flush, J2 13mm  
N = 3 row, J1/J2, 17mm  
O = 5 row, w/o PO  
P = 5 row, w/ PO  
Q = 3 row, 13mm  
R = 3 row, 17mm  
S = RT-2 (JO-J6) 6U  
U = RT-2 (JO-J2) 3U  
X = No Connectors  
Y = Hybrid  
Z = Custom

- DRIVES  
1 = 1 x 3.5"  
2 = 2 x 3.5"  
3 = 1 x 5.25" HH  
4 = 2 x 5.25" HH  
6 = 2 x 3.5", 1 x 5.25" HH  
7 = 1 x 3.5", 2 x 5.25" HH  
8 = 2 x 3.5", 2 x 5.25" HH  
9 = 1 x 3.5", 1 x 5.25" HH  
A = 1 x 2.5", 1 x CDR (SL)  
B = 2 x 2.5"  
D = 1 x slim line CDR  
X = No Mounting

- WIDTH  
2 = 2U  
3 = 3U  
4 = 4U  
6 = 6U

- HEIGHT  
8 = 84 T

- REAR I/O  
N = No  
Y = Yes

- DEPTH  
3 = 300mm - 399mm  
4 = 400mm - 499mm

- CARD ORIENTATION  
V = Vertical

- PSU INPUT  
A = 110/220VAC (Plug-in)  
C = 90-230VAC (Fixed)  
E = 110/220VAC (2xHS, N+1)  
G = 90-230VAC (Plug-in)

- H = 48VDC (Plug-in)  
K = 48VDC (Fixed)  
M = 48VDC (2xHS, N+1)  
N = 28VDC (Fixed)  
O = 28VDC (2xHS, N+1)  
P = 90-230VAC (2xHS, N+1)  
X = No PSU

- PSU OUTPUT  
(NOT ALL PSU COMBINATIONS AVAILABLE)  
1 = 100 - 199 watts (w/o 3.3V)  
2 = 200 - 299 watts (w/o 3.3V)  
3 = 300 - 399 watts (w/o 3.3V)  
A = 100 - 199 watts (w 3.3V)  
B = 200 - 299 watts (w 3.3V)  
C = 300 - 399 watts (w 3.3V)  
D = 400 - 499 watts (w 3.3V)  
E = 500 - 599 watts (w 3.3V)  
F = 600 - 699 watts (w 3.3V)  
G = 700 - 799 watts (w 3.3V)  
H = 800 - 899 watts (w 3.3V)  
I = 900 - 999 watts (w 3.3V)  
J = 1000 - 1099 watts (w 3.3V)  
M = 1300 - 1399 watts (w 3.3V)  
X = Not Installed

- SHIELDING LEVEL  
0 = Level 0  
1 = Level 1  
2 = Level 2  
X = Not Installed