


5U 14-Slot ATCA Backplanes

AdvancedTCA 40G Backplanes

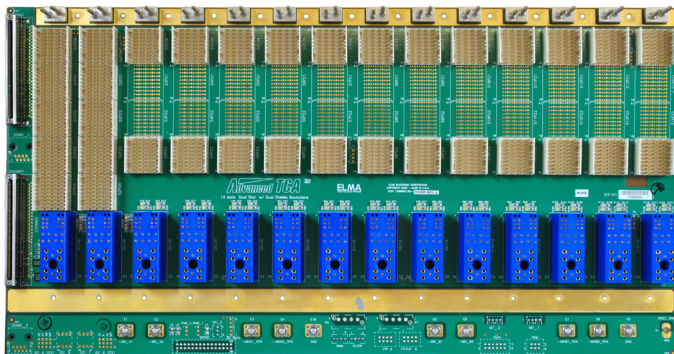

Description

The Elma Bustronic 14-slot 40G AdvancedTCA (ATCA) backplanes are designed to the requirements of PICMG 3.1R2 specification. The experts in high-speed differential pair routing, Elma Bustronic's ATCA backplanes have been simulated and characterized by our signal integrity lab to optimize performance.

Features

- Designed to the requirements of PICMG 3.1R2
- Up to 400W/slot 48VDC distribution to each slot
- Designed to meet 40Gbps (4 x 10G ports) data rates
- Based on design principles of IEEE 802.3-2012 (Section 5 Annex 69B.4), 10GBASE-KR, and 40GBASE-KR4
- Dual Star topology
- Nelco 4000-13EP-SI high grade laminate material
- Extensive pre-layout and post-layout simulation studies
- Backdrilled to minimize stub reflections
- Very low insertion loss deviation (ILD)
- Dual shelf managers in slot 0, radial IPMB/12C implementation

Board Specifications

- 0.160" +/-10% thick, PCB UL recognized 94V-0, Nelco 4000-13EPSI

Mechanical Specifications

- 17.55" wide x 8.83" height (5U)


Related Products and Applications

Platforms to meet NEBS or (ETSI) requirements for carriers and telecom equipment broadband networks

- Application and media servers, IPTV video-on-demand delivery and billing platforms
- Wireless Communications such as 2G, 3G and 4G (LTE and WiMAX) radio access networks (RAN)
- Wireline Communications such as media gateways, service provider routers and switches, and signaling gateways
- Applications requiring a mix of I/O options, high compute density and enhanced graphics

Communications platforms and servers for deployment in mobile and harsh environments

- Field deployed critical communications
- Mobile command centers



- Rackmount, desktop, and custom chassis platforms
- Load boards convection or conduction cooled
- Rear Transition Modules for I/O
- Blade level networking boards (Ethernet, PCI Express)
- Ruggedization programs

ATCA



8.837

14 SLOT DUAL STAR w/ DUAL 5MM6 BACKPLANE

Advanced TGA

ELMA

17.553

Height	Total Slots	Description	Part Number
5U	14	Dual Star, 40G with bused IPMB	109ATCA514-0003R
5U	14	Dual Star, 40G with Radial IPMB (2 x uTCA connectors)	109ATCA514-0013R