Systems By Design



8092 – PMC to PCI Adapter - For Delivery Systems



This PMC to PCI Adapter product from ACT/Technico permits delivery of PMC-derived applications in a standard PCI environment.


Mechanically, a PMC card fits cleanly on a short-length PCI board, resulting in a highly acceptable delivery solution for desktop applications. Effectively, PMC suppliers can introduce products to desktop packaging without having to maintain two PCI-based designs — one for standard PCI and a second for PMC. Note that the inverse — standard PCI boards plugging into VMEbus boards — is mechanically awkward.

This product was designed to reduce cost. It does not have LEDs, clamping diodes, logic analyzer test headers and test features found on other more comprehensive PMC development tools thus providing cost savings. Also, PMC Side 1 is not accessible for probing.

The A and C rows of a 96-pin DIN connector, located toward the rear of the board, connect with the 64-pin user I/O connector (J4/P4) on the mezzanine card. This connection is specified by IEEE 1386 for the P2 connector on VMEbus boards and permits internal connection of rear I/O, should the PMC board support rear I/O connectivity.

A 2.5 mm thick aluminum panel, with a 0.5 mm chamfered edge, is provided on the PCI board bracket. This mimics the mechanics of a PMC installed on a VMEbus board or other host environment.

To minimize the overall net size of PCI signals, it is recommended that only one of these adapters be installed in a standard PCI-based system. Preferably, the adapter should be located at the endmost PCI slot to minimize stubbing of the PCI bus.

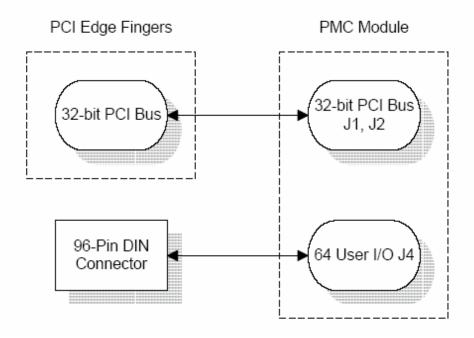

Technical Data

Power

+5 Volt, 3.3V or 5V PCI signaling environment

Environmental Operating Storage/Transit Temperature: $+5^{\circ}$ C to $+50^{\circ}$ C -20° C to $+60^{\circ}$ C

Humidity (NC): 5% to 90% @ 40° C

Electromagnetic Compatibility (EMC)

Intended for use in systems meeting the following regulations: U.S.: FCC Part 15, Subpart B, Class A (non-residential)

Canada: ICES-003, Class A (non-residential)