


ISOLATED POWER SUPPLY


11.4V TO 36V, MIL-STD-1275/704/461/810

DESCRIPTION

This rugged isolated power supply is capable of supplying up to 25W of power across two outputs (one 5V and one 3.3V) or 50W of power across four outputs (dual 5V and dual 3.3V) for a range of sensitive defense applications as well as industrial applications. Its form factor allows it to work as a standalone power supply or as a non-stack through PCI/104 supply. It is ideal for compact small form factor (SFF) systems designed for long term reliability in tough environments that demand input output voltage isolation. For critical power conditioning requirements in defense applications the isolated power supply is MIL-STD-1275D, MIL-STD-704F, MIL-STD-461F and MIL-STD-810G compliant with an input voltage spread of 11.4V to 36V. The isolated power supply also meets the requirements of rugged industrial applications as well.

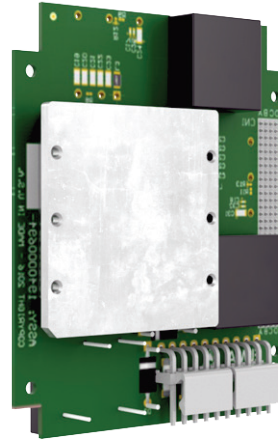

Dual Voltage Outputs

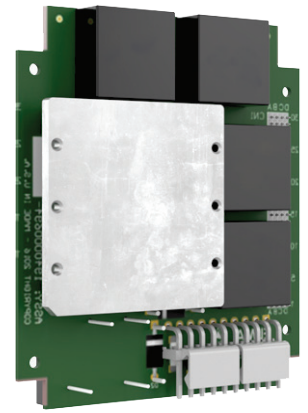

Four Voltage Outputs

Features

- Non-stack through PCI/104 or standalone operation in any small form factor system
- Ideal for use in non PCI/104 system architectures using discrete connectors for power distribution
- 11.4V to 36V DC input
- Voltage Output: Single 5V and 3.3V or dual 5V and 3.3V output options. Output wattage 25W/50W. Inquire about other available voltage options
- MIL-STD-1275D, MIL-STD-704F, MIL-STD-461E and MIL-STD-810G compliant
- -40°C to 85°C extended operating temperature

Benefits

- Applicable to a wide range of SFF systems
- Access to Elma's integration and packaging experts for complete system level design and integration support

APPLICATIONS

The rugged isolated power supply is ideal for use in SFF systems targeted for space constrained installations in demanding environments common in defense and industrial applications. Ideal for air and ground based vehicular defense equipment requiring stringent signal isolation.

RELATED PRODUCTS




- > Rugged and industrial system enclosures
- > Thermally conductive card edge retainers.
- > Small form factor building blocks; carrier cards, I/O cards, power supply options

ISOLATED POWER SUPPLY

11.4V TO 36V, MIL-STD-1275/704/461/810

LINE DRAWING

Designed for PCI/104 standard connectivity. Some dimensional deviations apply as shown here.

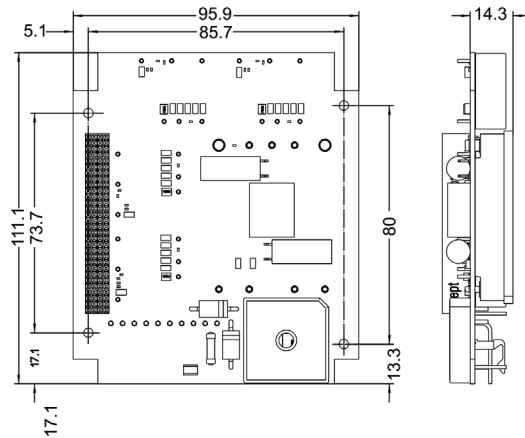**SPECIFICATIONS****Input / Output**

Voltage Input: Nominal 28.0 V DC

Defense/Industrial: (11.4V to 36V DC with support for +/- 250V spike and 100V surge per MIL-STD-1275D)

Voltage Output: Single 5V(3A) and 3.3V(3A) or dual 5V(3A) and 3.3V(3A) output options. Output wattage 25W/50W

Isolation: 1500V Galvanic Isolation DC

Input protection: Reverse Polarity, Voltage Transient, Surge, Spike, Over current

Output Protection: Overcurrent protection

Surge and Spike Protection: MIL-STD-1275D

Input Transients: MIL-STD-704F

EMI filter: MIL-STD-461F

Environmental

Operating temperature: -40°C to 85°C/-40°F to 185°F (MIL-STD-810G, Methods 501,502)

Storage temperature: -40°C to 85°C/-40°F to 185°F (MIL-STD-810G, Methods 501,502)

Operating shock: 40g, 11ms (MIL-STD-810G, Meth 516)

Crash Hazard Shock: 75g, 6ms (MIL-STD-810G, Meth 516)

Random vibration: 10Hz to 2000Hz (MIL-STD-810G, Method 514)

Humidity: Up to 95% RH @40°C, Non-condensing (Conformal Coated)

Operational Altitude: Up to 15,000 feet (4,572 meters) MIL-STD-810G, Method 500

ORDER INFORMATION**Description**

25W/50W small form factor power supply for non-stack through PCI/104 use or standalone operation. Single 5V and 3.3V (-2) or 2 each 5V and 3.3V (-4)

25W/50W small form factor power supply for non-stack through PCI/104 use or standalone operation. Single 5V and 3.3V (-2) or 2 each 5V and 3.3V (-4). Conformal coated

Model Number

PCI104-SFF-IPSU-11-36-2 or -4

PCI104-SFF-IPSU-11-36-2-C or -4-C

© Copyright 2019 by Elma Electronic, Inc. Subject to technical modifications, all data supplied without liability.

Please contact our sales team for more details.

China: +86 21 5866 5908

Germany: +49 7231 97 34 0

Singapore: +65 6479 8552

United Kingdom: +44 1234 838 822

France: +33 388 56 72 50

Israel: +972 3 930 50 25

Switzerland: +41 44 933 41 11

United States: +1 510 656 3400