

3U COMPACTPCI® SERIAL BACKPLANE 2 SLOTS, SYSTEM SLOT RIGHT, ETHERNET FULL-MESH

DESCRIPTION

The 3U 2-slot CompactPCI® Serial backplane provides one system slot and one peripheral slots. The CompactPCI® Serial specification, CompactPCI® S.0 is based on the CompactPCI® mechanical form factor. It supports serial point-to-point connections via a single star backplane architecture and optionally IEEE 802.3 Ethernet standard in a single star or mesh architecture. CompactPCI® Serial backplanes are intended for use in systems requiring symmetrical multiprocessing and component redundancy.

FEATURES

- CompactPCI® Serial (PICMG CPCI-S.0) compliant backplane
- 1 x CompactPCI® S.0 system slot right (CPU) and 1 x CompactPCI® S.0 Peripheral Slot
- High-speed connectors supporting data transfer rates up to 12 Gbps in all 2 slots
- Designed to support Rear Transition Modules
- Single star topology for serial interfaces such as PCI Express, SATA, USB 2.0 and USB 3.0 are provided by the CompactPCI® S.0 system slot
- All 2 slots are connected to each other through a full mesh Ethernet topology
- Europacard form factor in 3U height
- Temperature Range Operating and Storage: -40°C to +85°C

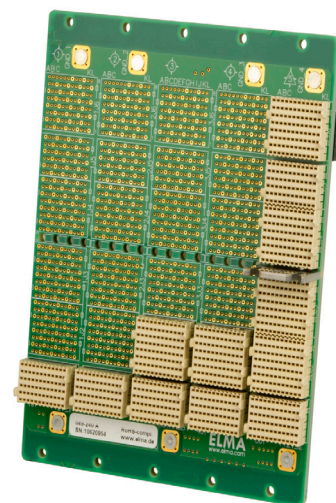


image similar

BOARD SPECIFICATIONS


- 3U, 2 slots, system slot right
- Utility connectors for system control and management
- Power in made over M3 power studs

MECHANICAL SPECIFICATIONS

- Slot pitch: 0,8" (20.32 mm)
- PCB size: 39.8 mm x 128.5 mm
- PCB thickness: 4.4 mm

3U COMPACTPCI® SERIAL BACKPLANE
2 SLOTS, SYSTEM SLOT RIGHT,
ETHERNET FULL-MESHFULL-MESH

BACKPLANE DIAGRAM

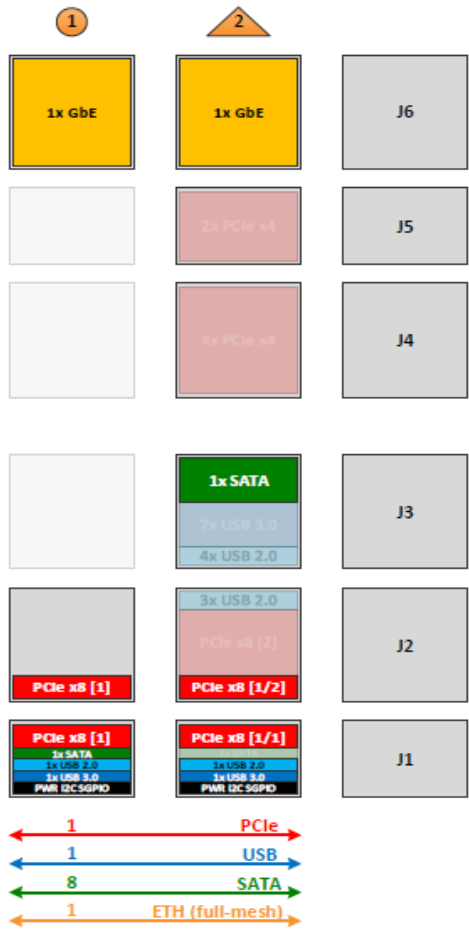

ORDER INFORMATION

Hight	Total Slots	Description	Part Number
3U	2	CompactPCI® Serial 3U Backplane with 2 Slots, System Slot Right, Ethernet full-mesh, without connectors for RTMs (Rear Transition Modules)	1CPCIS-302-R200
3U	3	CompactPCI® Serial 3U Backplane with 2 Slots, System Slot Right, Ethernet full-mesh,	1CPCIS-302-R210