

# 3U COMPACTPCI® SERIAL BACKPLANE

## 9 SLOTS, SYSTEM SLOT LEFT, ETHERNET FULL-MESH

### DESCRIPTION

The 3U 9-slot CompactPCI® Serial backplane provides one system slot and 8 peripheral slots. The CompactPCI® Serial specification, CompactPCI® S.0 is based on the CompactPCI® mechanical form factor. It supports serial point-to-point connections via a single star backplane architecture and optionally IEEE 802.3 Ethernet standard in a single star or mesh architecture. CompactPCI® Serial backplanes are intended for use in systems requiring symmetrical multiprocessing and component redundancy.

### FEATURES


- CompactPCI® Serial (PICMG CompactPCI® S.0) compliant backplane
- 1 x CompactPCI® S.0 system slot left (CPU) and 8 x CompactPCI® S.0 Peripheral Slots
- High-speed connectors supporting data transfer rates up to 12Gbps in all 9 slots
- Designed to support Rear Transition Modules
- Single star topology for serial interfaces such as PCI Express, SATA, USB 2.0 and USB 3.0 are provided by the CompactPCI® S.0 system slot
- All 9 slots are connected to each other through a full mesh Ethernet topology

### BOARD SPECIFICATIONS

- 3U, 9 slots, system slot left
- Utility connectors for system control and management
- Power in made over M3 power studs

### MECHANICAL SPECIFICATIONS

- Slot Pitch: 0.8" (20.32 mm)
- PCB size: 182.4 mm x 128.5 mm
- PCB thickness: 4.4 mm

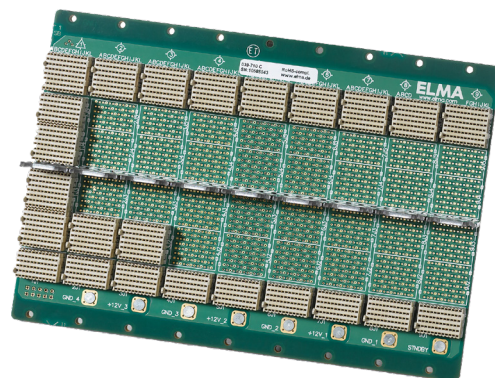


# 3U COMPACTPCI® SERIAL BACKPLANE

## 9 SLOTS, SYSTEM SLOT LEFT,

## ETHERNET FULL-MESH

### BACKPLANE DIAGRAM

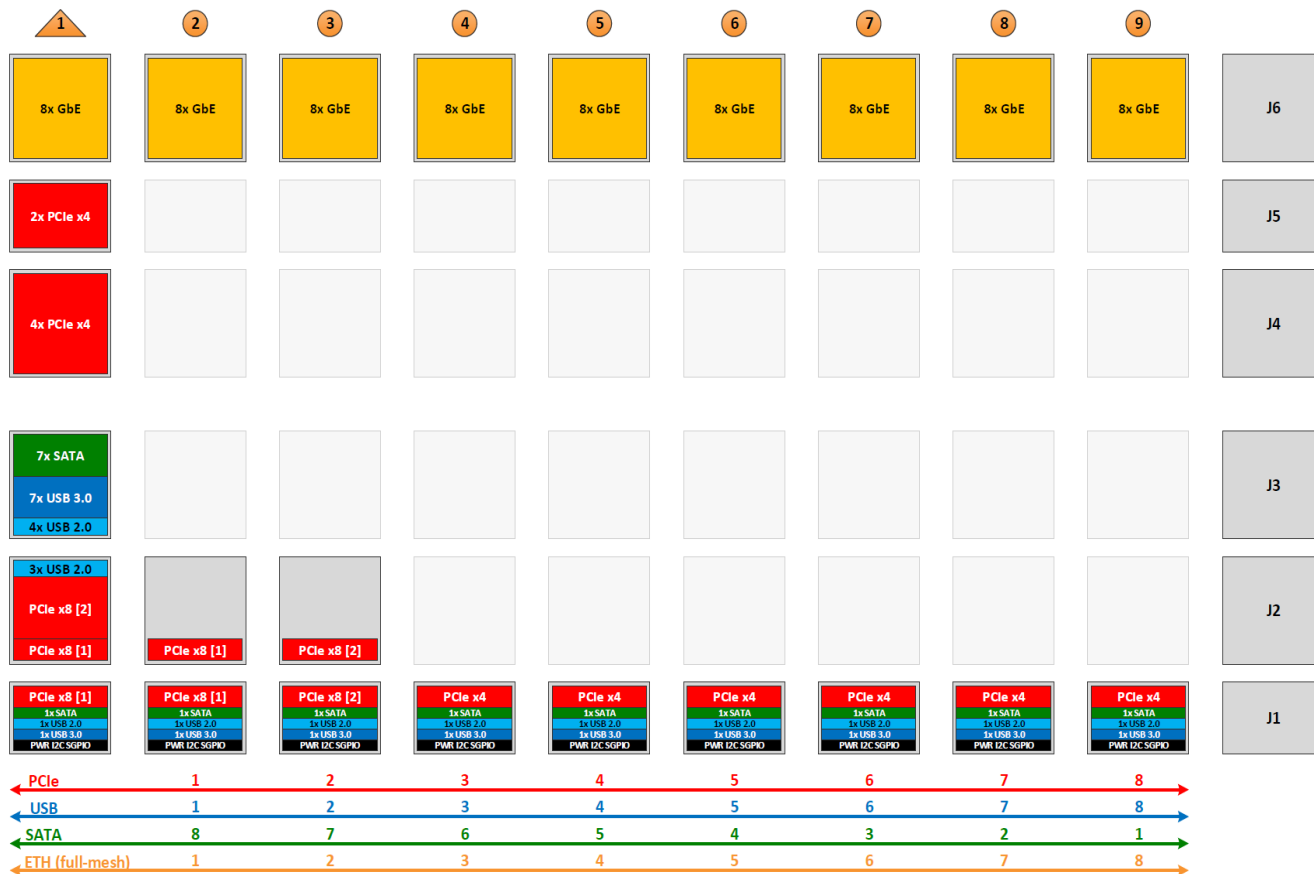

### ORDER INFORMATION

High	Total Slots	Description	Part Number
3U	9	CompactPCI® Serial 3U Backplane with 9 Slots, System Slot Left, Ethernet full-mesh, without connectors for RTMs (Rear Transition Modules)	1CPCIS-309-L200
3U	9	CompactPCI® Serial 3U Backplane with 9 Slots, System Slot Left, Ethernet full-mesh, with connectors for RTMs (Rear Transition Modules)	1CPCIS-309-L210