

VITA System 11 Vertical Enclosure (7U)




FEATURES:

- 19" Rackmount fully compliant to IEEE 1101.10/.11
- 7U x 84HP x 290mm (H x W x D)
- 6U Vertical card mounting
- Rear 6U x 80mm I/O card cage
- Optional 80mm Rear I/O
- 3 to 12 slot VITA-Based System Platforms (VME, VME64x, VPX, VXS, VXI) backplane options
- Advanced EMC shielding to meet CE and FCC
- Cooling bottom to top
- Wide range of PSU inputs (90 - 264 VAC, 48 VDC)
- Fixed-mount or front pluggable PSUs with redundant hot swap options
- System monitoring for DC voltages, fan fail and over temp (optional)
- Connector options: 3 Row (96 PIN), 5 Row (160 PIN), 5 Row + P0
- Ready to run - turnkey solution


SCOPE OF SUPPLY

High quality 19" rackmount chassis platform consisting of pre-galvanized steel enclosures, high performance VITA System backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.


ORDERING INFORMATION

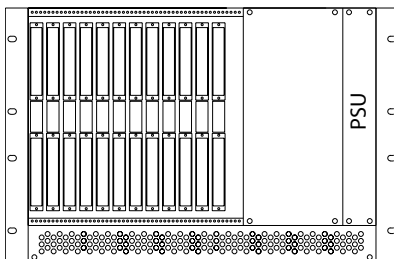

Description	Order Number
<ul style="list-style-type: none"> ■ 7U(H) x 17" (W) x 290mm(D) ■ Holds 12, 6U x 160mm Card ■ 12 Slot VME64x Backplane ■ No Device Mounting ■ 3 x 114 CFM Fans ■ 500 watt Plug-in PSU: 5V/60A; +12V/12A; 12V/4A; 3.3V/60A 	<p>11V12OPX78Y2VGE1</p> <p>64X</p>

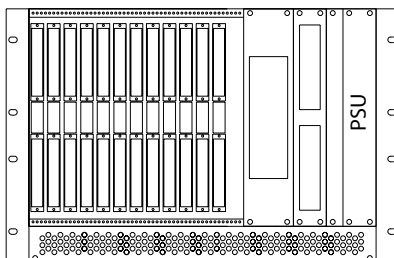

Description	Order Number
<ul style="list-style-type: none"> ■ 7U(H) x 17" (W) x 290mm(D) ■ Holds 12, 6U x 160mm Card ■ 12 Slot VME64x Backplane ■ 1 x 5.25" & 2 x 3.5" Devices ■ 3 x 114 CFM Fans ■ 500 watt Plug-in PSU: 5V/60A; +12V/12A; -12V/4A; 3.3V/60A 	<p>11V12OP678Y2VGE1</p> <p>64X</p>



Right Side View

