
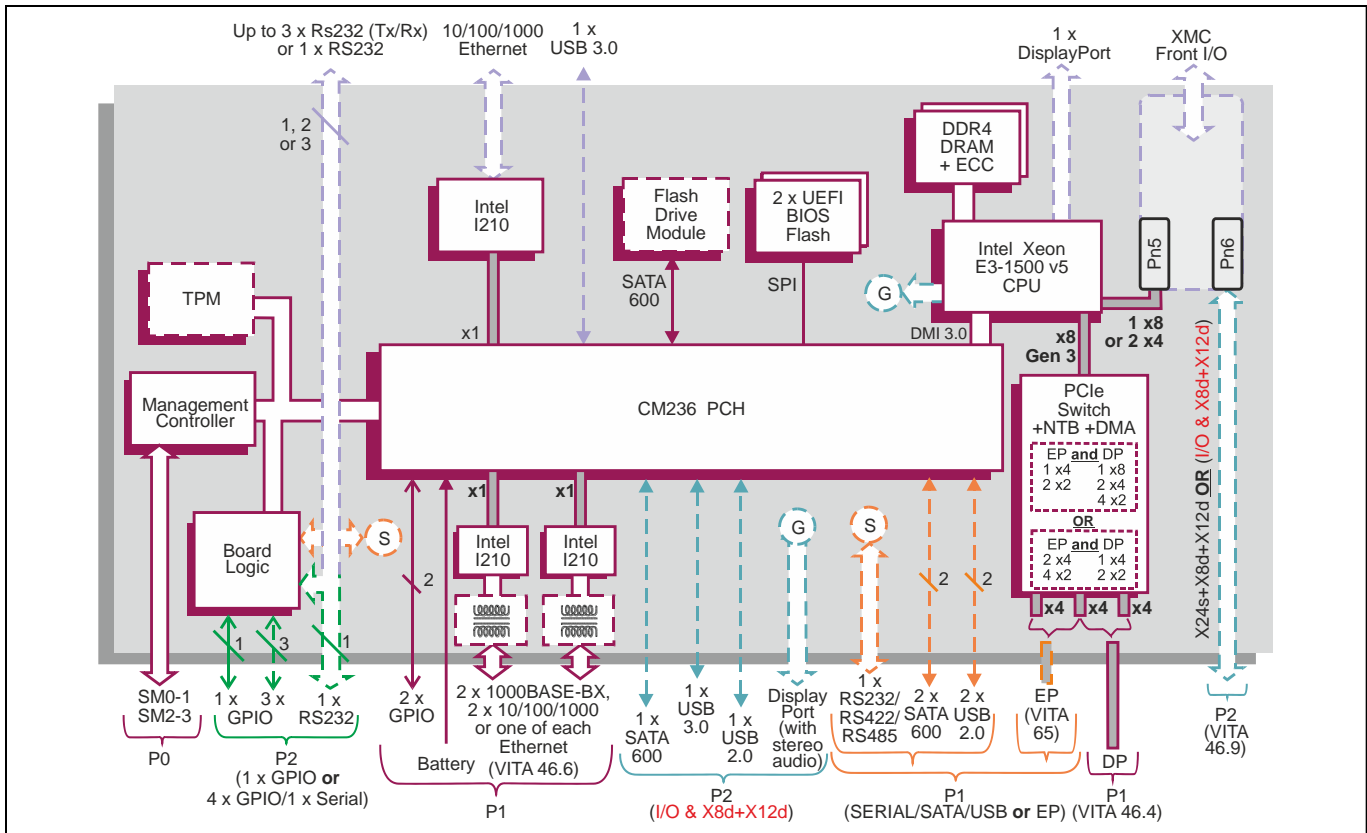


3U VPX™ board based on Intel® Xeon™ E3-1500 v5 processor family

Key Features

TR E5x/msd is a 3U VPX™ module based on the Intel® Xeon® processor E3-1500 v5 family to provide enhanced processing performance with optimized Size, Weight and Power (SWaP) characteristics.

- Mobile workstation processor performance with enterprise-class graphics capabilities
- Error Correction Code (ECC) memory for high operational reliability
- XMC module site for local I/O expansion or front panel I/O
- Local solid state disk module site for rugged storage
- Compatible with popular OpenVPX™ module profiles enabling widespread use in VPX™ solutions
- Options for use in rugged conduction-cooled environments

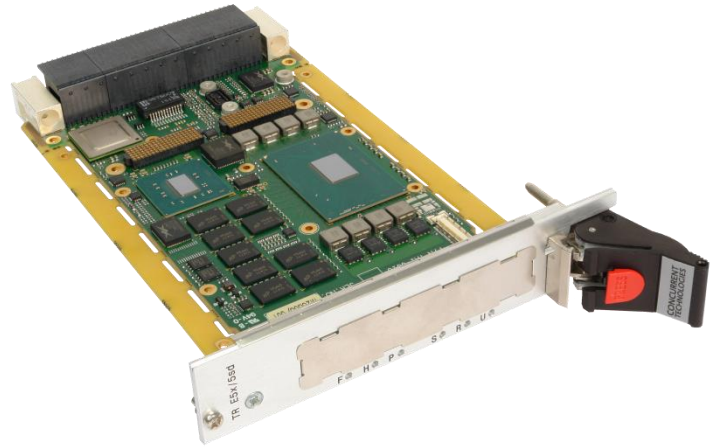

VPX Processor Board

- air-cooled 3U VPX™ computing board utilizing a CPU from the Intel® Xeon® processor E3-1500 v5 family:
 - optional Rear Transition Module (RTM)
- compatible with several OpenVPX™ module profiles:
 - MOD3-PAY-2F2U-16.2.3-3
 - MOD3-PAY-2F1F2U-16.2.1-4
 - MOD3-PAY-1F2F2U-16.2.2-4
- rugged conduction-cooled VPX-REDI™ variants available:
 - see TR E5x/msd-RCx datasheet

Central Processor

- 4-core Intel® Xeon® processor E3-1515M v5:
 - 8 Mbytes Smart Cache, 2.8 GHz
 - Intel® Iris™ Pro Graphics P580
- 4-core Intel® Xeon® processor E3-1505M v5:
 - 8 Mbytes Smart Cache, 2.8 GHz
 - Intel® HD Graphics P530
- 4-core Intel® Xeon® processor E3-1505L v5:
 - 8 Mbytes Smart Cache, 2.0 GHz
 - Intel® HD Graphics P530
- utilizes the Intel® CM236 Platform Controller Hub

DRAM

- up to 16 Gbytes soldered DDR4 ECC DRAM:
 - single bit error correction
 - dual channel architecture
 - accessible from processor or VPX™ fabric

XMC Interface (Build Option)

- 1 x XMC site, in a single VPX slot (VITA 42.0):
 - front panel I/O and build options for P2 rear I/O
 - 1 x8 or 2 x4 PCI Express® Gen 2 (VITA 42.3) XMC (Switched Mezzanine Card) interface
 - +5V or +12V powered (factory build option)
- no XMC site with the optional front panel I/O

XMC P2 I/O plus Additional P2 I/O Option

- P2 factory build options, option 1 (full rear XMC I/O) or option 2 (reduced XMC I/O plus additional P2 I/O)
- XMC build option 1 supports the following:
 - full rear XMC I/O, providing X24s+X8d+X12d
 - DisplayPort® is not available (board is headless)
- XMC build option 2 supports the following:
 - reduced rear XMC I/O, providing X8d+X12d
 - 1 x USB 2.0 port and 1 x USB 3.0 port
 - 1 x SATA600 interface
 - 1 x DisplayPort™ with audio interface
- XMC rear I/O supports VITA 46.9 pin-mapping

Graphics/Audio Interfaces

- up to 2 x independent graphics/audio interfaces:
 - DisplayPort interface, supporting audio and video, via the optional front panel I/O
 - DisplayPort interface, supporting audio and video, via P2 (XMC build option 2)
 - resolution is dependent on the device driver
- support for Microsoft® DirectX 12 and 11.x
- support for OpenGL 4.x and 5.x under Windows® and Linux®
- support for OpenCL 1.1

Serial Ports

- 1 x RS232/422/485 port accessed via P1 (replaces VPX Expansion Plane PCI Express interface):
 - supporting Tx, Rx, RTS and CTS in RS232 only
- option for 1 x RS232 port accessed via P2:
 - supporting Tx, Rx, RTS and CTS
- 1 x RS232 (full modem) or 3 x RS232 (Tx/Rx) ports via the optional front panel I/O:
 - the RS232 configuration is user selectable
- 16550 compatible UARTs

Other Peripheral Interfaces

- PC RTC, long duration timer, watchdog timer
- up to 4 x USB ports via the rear:
 - option for 2 x USB 2.0 ports via P1 (replaces VPX Expansion Plane PCI Express interface)
 - option for 1 x USB 2.0 port and 1 x USB 3.0 port via P2 (XMC build option 2)
- 1 x USB 3.0 port via the optional front panel I/O
- 2 x GPIO signals via P1
- option for up to 4 x GPIO signals via P2 (1 or 4)

Front Panel I/O (Build Option)

- front panel I/O build option (no XMC site) supports:
 - 10/100/1000 Mbps Ethernet port via RJ45
 - 1 x USB 3.0 port
 - up to 3 x RS232 (Tx/Rx) ports via an RJ45 or 1 x RS232 full modem via RJ45, user selectable
 - 1 x DisplayPort interface (resolution dependent on device drivers)

Mass Storage Interfaces

- 2 x SATA interfaces via P1 (replaces VPX Expansion Plane PCI Express interface):
 - 1 x SATA600 interface
 - 1 x SATA300 interface
- 1 x SATA600 interface via P2 (XMC build option 2)
- 1 x SATA600 interface for an optional on-board Flash Drive Module

System Management

- IPMI via SM0-3, accessing:
 - voltages monitor, CPU temperature monitor and board temperature monitor
- Baseboard Management Controller (BMC)

Optional Built-In Test (BIT) Support

- Power-on BIT, Initiated BIT, Continuous BIT

Board Security Features

- option for Trusted Platform Module (TPM 2.0)
- option for Sanitization Utility Software Package
- option for proprietary board-level security features

Software Support

- supports Linux®, Windows® and VxWorks®

Firmware Support

- UEFI 2.4 boot firmware (BIOS):
 - UEFI 2.4 support
 - includes Compatibility Support Module
 - implements Secure Boot
- implements Intel® Boot Guard
- LAN boot firmware included

Non-Volatile Memory

- 8 Mbytes of BIOS Flash EPROM, dual devices

VPX Control Plane, Ethernet

- configurable Control Plane (VITA 46.6)
- P1 factory build option for 2 x 1000BASE-BX ports (IEEE802.3z)
- alternative P1 factory build options for 2 x 10/100/1000 Mbps Ethernet ports or 1 x 1000BASE-BX and 1 x 10/100/1000 Mbps Ethernet ports (with or without magnetics):
 - optional Rear Transition Module available

VPX Data/Expansion Planes, PCI Express

- configurable PCI Express (PCIe) VPX Data Plane fabric interface (VITA 46.4) option A or B
- P1 build options for either:
 - PCIe Expansion Plane interface (VITA65), A or B
 - 1 x Serial, 1 x SATA600, 1 x SATA300 and 2 x USB 2.0 ports
- option A: 8 lane Data Plane (1 x8 or 2 x4 or 4 x2) + 4 lane Expansion Plane (1 x4 or 2 x2)
- option B: 4 lane Data Plane (1 x4 or 2 x2) + 8 lane Expansion Plane (2 x4 or 4 x2 or 1 x4 + 2 x2)
- PCIe interfaces support Gen 1, Gen 2 and Gen 3
- PCIe switch supports two non-transparent ports for multi-processing configurations
- 4 channel DMA engine for fast data block moves
- switch ports can be configured by the VPX Switch Configuration Tool, see separate datasheet
- switch supported by Fabric Interconnect Networking software (FIN-S), see separate datasheet
- support for PCIe backplane common clock options

Safety

- PCB (PWB) manufactured with flammability rating of UL94V-0

Electrical Specification

- typical current consumption for 4-core Intel Xeon processor E3-1505M v5 with 16 Gbytes DRAM:
 - +5V @ 2.3A
 - +3.3V @ 4.1A; +3.3V AUX @ 0.3A
- +12V AUX and -12V AUX routed to XMC site

Environmental Specification

- operating temperature, all processors (CPU):
 - VITA 47 Class AC1, 0°C to +55°C (N-Series)
- extended operating temperature (selected CPU):
 - -25°C to +70°C (E-Series)
- non-operating temperature:
 - VITA 47 Class C1, -40°C to +85°C
- operating altitude:
 - 0 to 15,000 feet (0 to 4,572 meters)
- relative humidity:
 - 5% to 95%, non-condensing

Mechanical Specification

- 3U VPX form-factor (VITA 46.0, VITA 48.0)
- 3.9 inches x 6.3 inches (100mm x 160mm)
- slot width 1.0-inch air cooled:
 - IEEE 1101.10 as per VITA 46.0
 - or VITA 48.0 as per VITA 65
- connectors to VITA 46.0 for P0, P1 and P2
- operating mechanical:
 - shock - VITA 47 Class OS1, 20g
 - random vibration - 0.002g²/Hz

Optional VPX Fabric Switch

- board is compatible with FR 331/x06 VPX Switch or FR 341/x06 VPX Switch